

NEW PRODUCT!

Vented Closet Panel



- Perfect for Laundry, Furnace, Water Heater or Air Handler openings.
- Constructed with 25 gauge steel, cold rolled or A40 galvanized.
- Smooth finish.
- Factory finished – Bright White, Ivory or primed.
- Easy to install.
- One year limited warranty.
- Designed as a single finish side panel.

CONSTRUCTION / FINISH

- Slimfold® Vented Closet Panel with full louver design
- Door panel only. Designed for use in finished or cased opening applications. Not compatible with stopped/soffitted frames.
 - Bright White or Ivory (electrostatically applied baked on enamel) Primer coat also available.
 - Cold rolled steel (standard) A40 galvanized optional.
 - Smooth finish.
 - 25 gauge steel face with 25 gauge steel stiffeners (top, middle and bottom).
 - Door swings on Slimfold designed pivot rods with a proven 75+ year design history.
 - Door latched with a simple ball catch

USAGE

Laundry Room
Furnace Area
Water Heater Closet
HVAC Closet

FINISH STANDARDS


Combined with A40 Galvanized steel, meets 500 hour salt spray test (ASTM B117-97) and 700 hour humidity test (ASTM D1735-87)

HARDWARE

Two (2) Slimfold pivot rods and one (1) ball catch. Supplied with door.

SPECIFICATIONS

Nominal Size	Finished Opening Size	Door Width	Door Height	Free Air Space
30" x 80" (2668)	30" x 80-1/2"	29-3/4"	78-1/2"	233 square inches
32" x 80" (2868)	32" x 80-1/2"	31-3/4"	78-1/2"	233 square inches
34" x 80" (21068)	34" x 80-1/2"	33-3/4"	78-1/2"	233 square inches
36" x 80" (3068)	36" x 80-1/2"	35-3/4"	78-1/2"	233 square inches

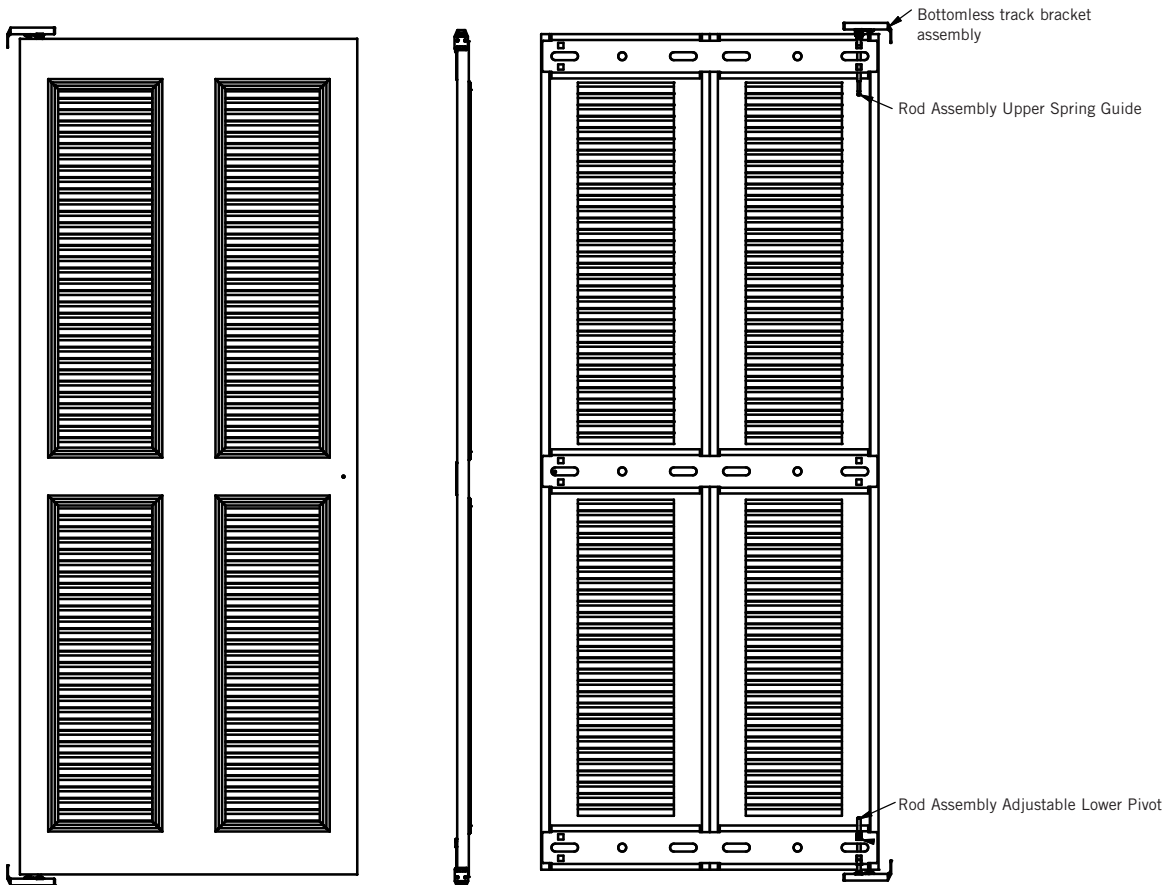

1101 Technology Drive | Dothan, Alabama 36303
800.633.7553 | 334.794.9184 fax
 www.dunbarton.com | sales@dunbarton.com