

Model 4260

Steel Framed Sliding Mirror Door with Bottom Roller



- Jump-resistant bottom roller
- Adjustable top L-Guides for greater vertical adjustment
- Easy to adjust for out-of-square openings
- One piece 1-3/4" deep top track and integral fascia
- Low rise bottom track for minimal floor obstruction
- 3 mm safety backed mirror
- 4 mm safety backed mirror for heights greater than 7'0"
- Track: Top and bottom track prefinished to match door
- Colors: Bright White, Arctic Silver
- Limited lifetime warranty

Model 4260 Steel Framed Sliding Mirror Door with Bottom Roller

MIRROR DOOR SPECIFICATIONS

Provide Model 4260 sliding mirror wardrobe doors manufactured by Slimfold Corporation, Dothan, AL in the dimensions shown on the drawings and with the following attributes:

ARRANGEMENT

- Sliding mirror doors shall consist of framed mirror panels supported by adjustable bottom rollers and adjustable top guides that travel in a threshold track and top track respectively.
- Top track to be prefinished steel with an integral fascia that matches the stile and rail finish.
- The bottom track shall be prefinished steel to match door frame and shall not exceed 5/16" (8mm) in height for minimum floor obstruction.
- The bottom roller shall be free floating and provide a 1" (25mm) vertical adjustment. Model 4260 rollers shall have plain bearing acetel wheels.
- The adjustable top guides shall be permanently fixed to the top connectors and fit snugly into the vertical openings in the top track.

FRAME

- The frame shall consist of prefinished roll-formed stiles and rails joined at each corner by positively retained, removable, unhande, connectors that snap in place and contain preassembled rollers and guides.

PANELS

- 3mm float plate glass mirror, safety backed to conform with Uniform Building Code Standard 24-2, Part II. Safety mirror 400 lb. ft. Impact test ANSI Z-97.1 1984 boil and impact test. 4mm float plate glass mirror for heights greater than 7'0".

FINISHES


Bright White, Arctic Silver

No. Panels	Size	Door Width	Finished Opening Width
2	4'0"	24-1/8"	48"
2	5'0"	30-1/8"	60"
2	6'0"	36-1/8"	72"
2	8'0"	48-1/8"	96"
3	9'0"	36-1/8"	108"
3	12'0"	48-1/8"	144"

Required Finished Opening Heights:

6'8" (80-1/2") and 8'0" (96")
(2045mm) (2438mm)

Finishing Open Width Tolerance +1/2" / -2"
(+13mm/-51mm)

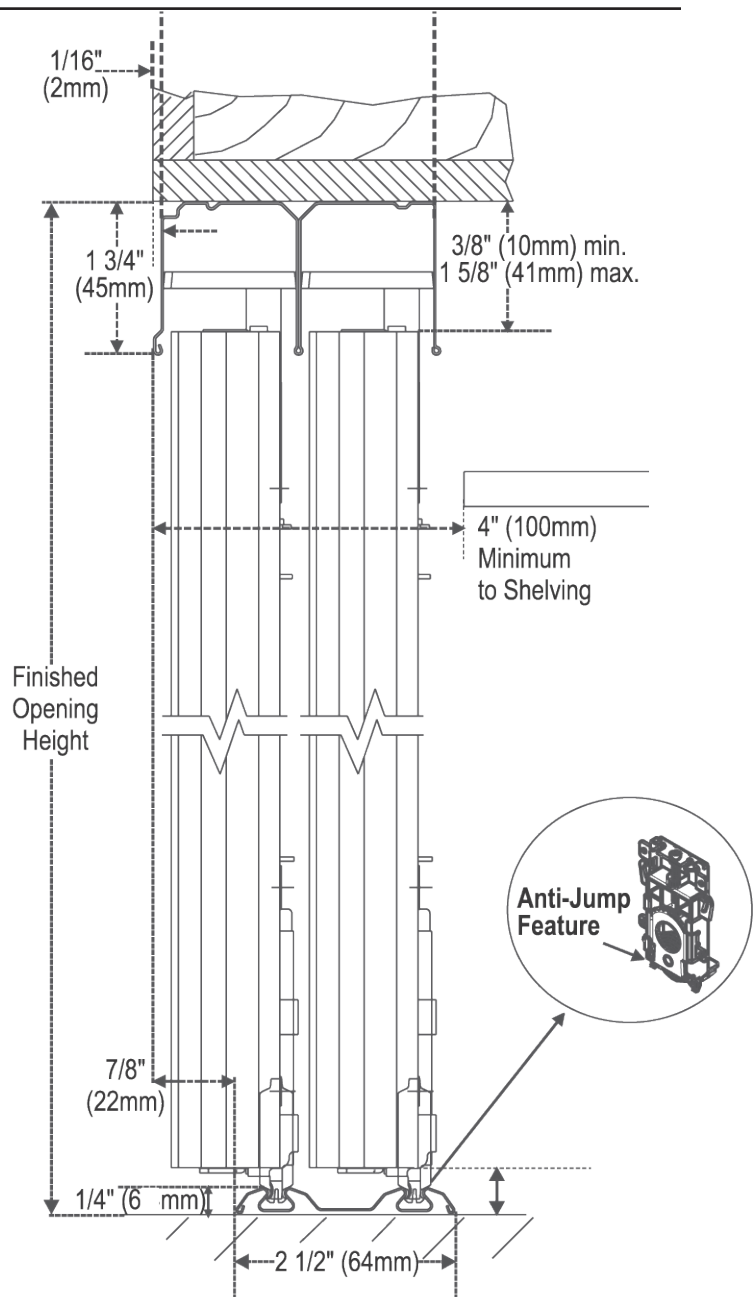

Sliding and Wardrobe Door Systems

P.O. BOX 8577 | Dothan, Alabama 36304-0577
800.633.7553 | 334.794.9184 (fax)
 www.dunbarton.com | sales@dunbarton.com